

900 MHz Outdoor Wireless Ethernet Radio

This new product allows you to build non-line-of-sight, point-to-multipoint wireless Ethernet connections that connect “fringe” IP devices, including IP access control readers, remote printers, remote PCs, VoIP phones, point-of-sale devices, digital signage or industrial control devices.

The AW900xTR radios include a built-in spectrum analyzer and they are IP addressable with web browser based remote configuration and diagnostic tools included.

AvaLAN’s products offer the ideal combination of price, range, data rate, security, interference avoidance, quality-of-service, and a simple plug and play set up with minimal user programming required.

With non line-of-site capabilities, these radios can easily penetrate up to 1,500’ through trees or up to 40 miles line-of-sight and supports industrial-grade temperature ranges. The system configuration can include up to 12 access points - each on its own non-overlapping channel (up to 192 subscriber units across a given site with 16 active clients per access point). These products are an ideal replacement for modest data rate installations where 802.11 systems are under-performing or failing completely due to insufficient range or excessive interference.

The AW900xTR is also available as a pre-configured matched pair bridge. Order the AW900xTR-PAIR.






Limited Time Bonus!

AW900xTR-PAIR includes two 11 dBi directional antennas

Features


- Built-in spectrum analyzer
- 128 bit AES encryption, FIPS 197 - NIST Certified
- Remote diagnostics and link analysis with browser interface
- Radio can be configured as an access point or client
- Simple plug and play – minimal user programming required
- Install up to 16 clients per access point
- Can operate up to 12 access points, each on its own non-overlapping channel
- Does not require an FCC license to operate or install
- High RF output power provides maximum foliage and / or wall penetration
- Rugged weatherproof cast aluminum outdoor package
- Line-of-sight range up to 40 miles with 15 dBi antenna
- 2.5 dBi Omnidirectional antenna included
- Six other optional antennas are available with up to 15 dBi directional gain
- Available as individual radios for multi-point systems or as a pre-configured matched pair bridge

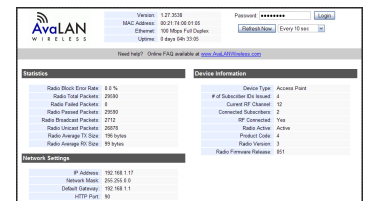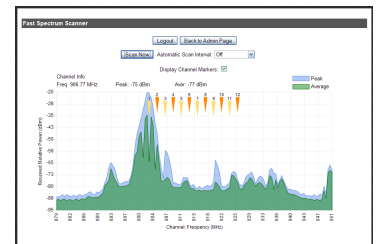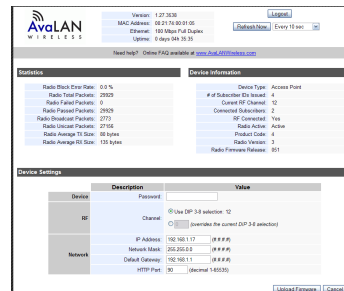


Screen Captures:
Web Browser-based Management Tools

Application Example:

Ultra-long-range, point-to-multipoint wireless system transmitting Ethernet data across golf course

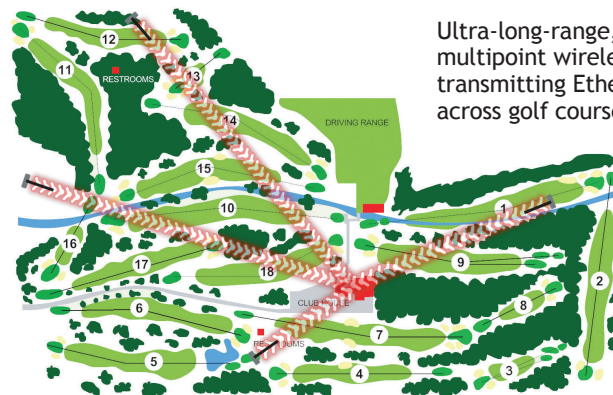

System diagram

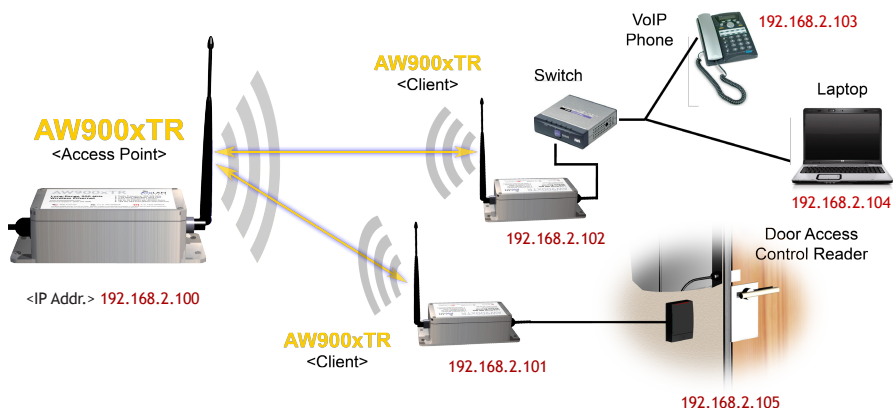

- Radios are IP addressable*, with Remote Configuration & Diagnostic Tools
- Radios Support Multiple IP Addresses at Each Remote Node**

* There is a limit of 128 routable MAC addresses per access point. This allows an Ethernet switch to be attached to subscriber units ("Client" in image at left), but limits to 128 the total number of Ethernet devices to which the access point can connect.

** There is a limit of 16 active subscriber units for each access point. A total of 12 access points (in the 900 MHz band) can be deployed to support up to 192 fixed subscriber units across a given site.

Technical specifications

CHARACTERISTIC	SPECIFICATION/DESCRIPTION
RF transmission rate	1.536 Mbps
Ethernet throughput	935 Kbps
Output power	+21 dBm (4 Watts EIRP when used with 15 dBi antenna)
Receiver Sensitivity	-97 dBm at 10 ⁻⁴ BER
Radio link budget	118 dB plus 2x antenna gain
Range	40 miles line-of-sight with 15 dBi antenna
RF channels/bandwidth	12 non-overlapping channels with 2.0833 MHz spacing and 1.75 MHz bandwidth
Frequency selection	Automatic or manually selectable via web browser interface.
Connector types	RF: RPTNC Female / 10/100 base T Ethernet RJ-45 / Power P5-2 2.1 mm
Status LEDs (Internal)	Power, Ethernet link, RF TX, RF RX, Channel (4), Link Quality (6)
Error correction technique	Sub-block error detection and retransmission
Adjacent band rejection	SAW receiver filter attenuates cellular and pager interference
Power regulation	Built-in switching regulator
Browser management tools	QoS Statistics, Network Settings, Spectrum Analyzer, Firmware Upgrade
Power consumption	Transmit: 1.7 Watts Receive: 0.8 Watts
Voltage	9 to 48 VDC via unused pins in RJ-45 jack - pins 4,5 positive, 7,8 ground
Transmit current draw	175 mA at 9 VDC 140 mA at 12 VDC 35 mA at 48 VDC
Temperature range	-40° C to +70° C
Size	170 x 80 x 50 mm not including connectors; 0.570 Kg
Compatibility	May be mixed in combination with AW900iTR and AW900xTP radios, not compatible with older AW900x, AW900xT, AW900i and AW900iT.

Ordering Information

AW900xTR

900 MHz Outdoor Wireless Ethernet Radio.

Contents:

- (1) AW900xTR Radio
- (1) AW2-900 2.5 dBi omni-directional antenna
- (1) AW-POE Power Over Ethernet Injector
- (1) 110 VAC to 12 VDC power adapter

AW900xTR-PAIR

900 MHz Outdoor Wireless Ethernet Bridge.

Contents:

- (2) AW900xTR Radios
- (2) AW11-900 11 dBi Directional Yagi Antennas
- (2) AW-POE Power Over Ethernet Injectors
- (2) 110 VAC to 12 VDC power adapters

©2004 – 2009 AvaLAN Wireless Systems Incorporated. All rights reserved. AvaLAN Wireless and the AvaLAN Wireless logo are registered trademarks of AvaLAN Wireless Systems Incorporated. All other trademarks are property of their respective owners. AvaLAN Wireless makes no representations or warranties with respect to the accuracy, utility, or completeness of the contents of this publication and reserves the right to make changes to specifications and product descriptions at any time without notice. No license, express or implied, by estoppel or otherwise, to any patents or other intellectual property rights is granted by this document. Particular uses or applications may invalidate some of the specifications and/or product descriptions contained herein. The customer is urged to perform its own engineering review before deciding on a particular application. AvaLAN Wireless products are not designed for use in medical, life saving, or life sustaining applications.