


ITEM #D2-XERO

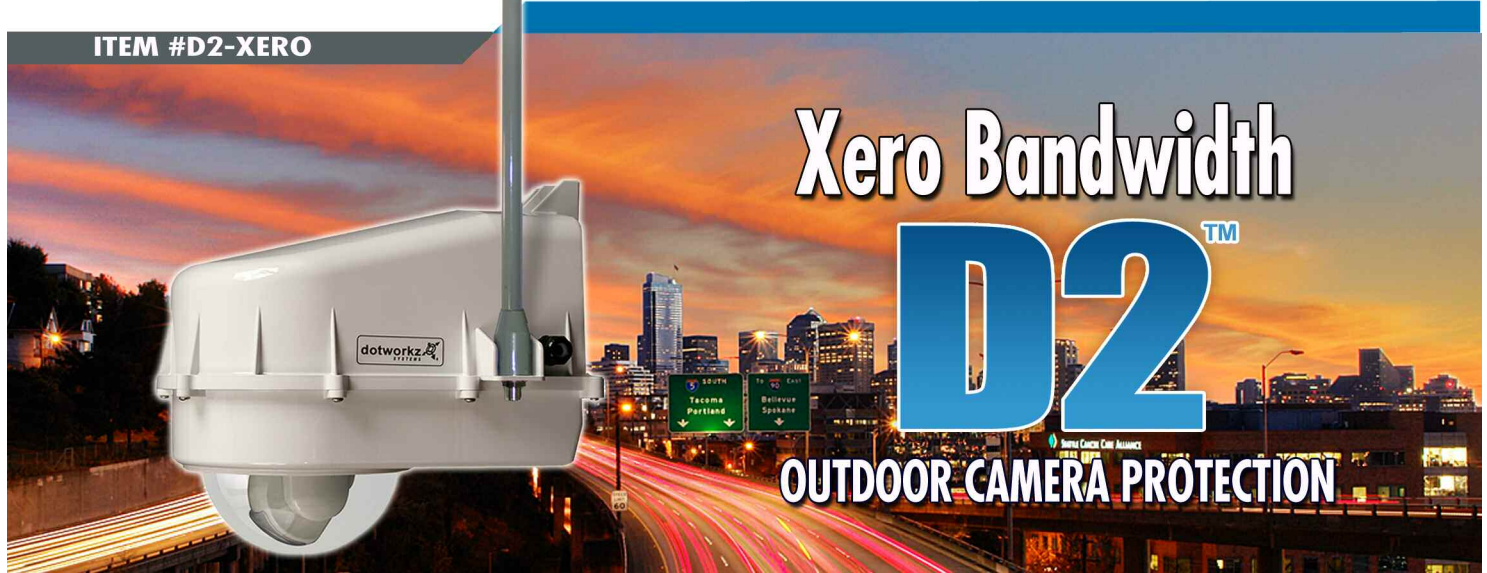

# Xero Bandwidth D2™ OUTDOOR CAMERA PROTECTION

## **QUICK DEPLOYMENT, PORTABLE WIRELESS SYSTEM WITH NVR**

Representing a new era in video surveillance, the new D2 Xero Bandwidth camera enclosure from Dotworkz is the first completely self-sustaining, portable wireless system with a built-in network video recorder. The NVR supports all current software, plus delivers full resolution, full frame rate video from one to five days retention as standard. In addition, an integrated Wi-Fi access point enables remote access of the Xero Bandwidth system — from controlling your PTZ camera to viewing and retrieving video data. Windows® and Linux® compatible.

### **Trouble-Free Relocation**

You can easily reposition the D2 Xero Bandwidth from one location to the next in minutes without the need of advanced technical staffing. This on-the-fly portability makes it ideal for temporary installations, such as urban police surveillance or monitoring construction sites, museum exhibits or public events.

### **Cost Effective**

Compared to fiber, cable or trenching, the enclosure is a real cost saver, especially in labor. Let us show you how much you can save.

### **Onboard Climate Control**

Protect your camera investment against severe climates while assuring maximum uptime for your system. Like all D2 units, the D2 Xero Bandwidth is NEMA 4X certified and IP66 rated for extreme outdoor environments. The unit's thermoplastic construction is vandal tough and UV resistant.

- Quick deployment
- Self sustaining integrated NVR module
- Economical solution requires only power
- On-board NVR for live recording
- Integrated Wireless AP for remote footage retrieval
- 802.11 b/g compatible
- Secure wireless with WPA/WPA2 encryption
- Active Cooling module with Cooldome
- Water and air tight — perfect for harsh environments
- Lenses available in Smoke and Clear
- Will not rust or corrode
- PTZ camera ready



The D2's simple design is compatible with 99% of IP and analog PTZ cameras including models from Axis, Sony, Toshiba, Canon and many more



1. Impact and scratch-resistant lens available in both clear and smoke with best clarity ratings in the industry
2. Antenna mount
3. Standard mounting to wall or pole (Vari-fit Universal Bracket)
4. Integrated NVR and Wireless module
5. Thermoplastic construction is vandal tough and UV resistant
6. IP66 and NEMA 4X (Cooldome version is IP65)

### Mechanical Size

Dimensions (L x W x H)	14.9" x 11.7" x 13.2" (378.5mm x 297.2mm x 335.3mm)
Weight (enclosure)	15 lbs (4.5 kg)
Construction	
Enclosure	Thermo Plastic Compound
Lens	High Impact Acrylic, .0625" Thickness (1.58mm)

### Environmental

Cooldome Active Cooling Module activates at	100F
Cooldome Active Cooling Module deactivates at	70F
Temperature range	40F to 150F

### NVR System

Processor	VIA C7 1.5GHz
RAM	1 GB
Hard Drive	320GB SATA II 2.5" (Upgradeable to 640GB)
OS	Pre installed Windows XP PRO SP3
Supported Software	ONSSI, Sony Realshot Manager, Canon VK64, Axis Camera Station, Milestone

### Wireless "Sidekick"

Mode	AP or AP
Type	Repeater
Frequency	2.4GHz
RF Transmission Rate	Up to 54Mbps
Range (w Line of Sight)	Up to 1 mile (1.61 kilometer)

### Electrical

Cooldome version (IP65)	12VAC 150W max
NVR	12VAC 50W max
Wireless	12VAC 6W max
Input Current	2.0 A @ 110 VAC max. including camera

### Accessories

Photocell Tap	upon request
Dome Wizard Cleaner Kit	AC-0928
EZ Lock Pole Mount Adapter	BR-MPM1
Tilt Angle Correction Plate	BR-MPM1-AC